

SPECIFICATIONS:

- PSI/Temperature Rating:** 300 PSI / 250° F
- Body Material:** Brass ASTM B584
- Body Tappings:** 1/4" NPT
- Y-Strainer:** 20 mesh stainless steel
- Ball Valve:** Brass body with chrome plated brass ball, 600 WOG
- Ball Valve Seal:** Teflon
- Assembly:** Strainer comes fully assembled
- Body Tappings¹:** Combination P/T Test Valve and Manual Air Vent (CPTA) and Drain Valve (not pictured)

DIMENSIONS & WEIGHTS (NOMINAL)


SIZE	MODEL NO.	A LENGTH (with BV)	A LENGTH	A LENGTH (SWT)	B HEIGHT	WEIGHT (LBS.)
1/2"	3650	4.7	2.8	2.4	4.0	1.5
3/4"	3650	5.5	2.6	2.6	4.2	2.3
1"	3650H	6.5	3.1	N/A	5.0	3.3
1-1/4"	3650J	7.5	4.4	N/A	5.7	4.9
1-1/2"	3650K	8.5	4.4	N/A	6.5	5.4
2"	3650L	10.2	7.2	N/A	7.5	8.7

MODEL NUMBER SELECTION

FNPT Y-STRAINER


Insert D=1/2", F=3/4", H=1"
J=1-1/4", K=1-1/2", L=2"

Add an "X" for Y-Strainer only, no Ball valve

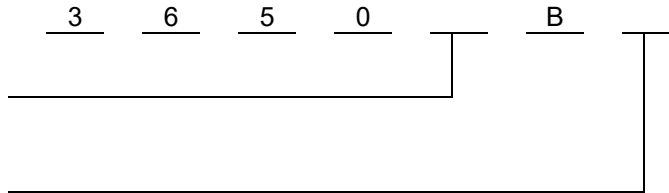


SWT¹ Y-STRAINER

Insert 21=1/2", 22=3/4"

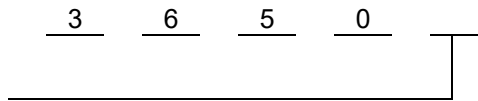

BALL VALVE

Insert 342=1/2", 243=3/4", 244=1",
245=1-1/4", 340=1-1/2", 813=2"



¹ Body Tappings in FNPT strainers are a leak proof metal to metal seal and do not require pipe dope or tape. Tape or dope should not be used. Sweat strainer includes a 1/4" body tapping for a drain valve but does not include a body tapping for a PT.

Replaces form F-2233

This specification © 2017 Griswold Controls

2803 Barranca Parkway, Irvine, CA 92606
(949) 559-6000 Fax (949) 559-6088
www.GriswoldControls.com

12/17
F-2233J

