

SPECIFICATIONS:

PSI / Temperature Rating: 125 PSIG / 400° F (See P/T Limit Chart)
Material: 316 Stainless Steel (150 Grit O.D./180 Grit I.D. Housing)


FLOW RATES (+/-5%)

SIZE	MODEL NO.	HEAD LOSS IN FEET ¹	PSID RANGE	GPM
1-1/2"	4942D	7.4	3.2-32	.55, .75, 1.00, 1.50, 2.00, 2.50, 3.00, 3.50, 4.00, 5.00, 6.00, 7.00, 8.00
	4948D	30.0	13-128	1.10, 1.50, 2.00, 3.00, 4.00, 5.00, 6.00, 7.00, 8.00, 10.0, 12.0, 14.0, 16.0
2"	4942E	7.4	3.2-32	4.5, 5.0, 6.0, 7.0, 8.0, 9.0, 10.0, 11.0, 12.0, 13.0, 14.0, 15.0, 16.0, 17.0, 18.0, 19.0, 20.0, 21.0, 22.0
	4948E	30.0	13-128	9.0, 10.0, 12.0, 14.0, 16.0, 18.0, 20.0, 22.0, 24.0, 26.0, 28.0, 30.0, 32.0, 34.0, 36.0, 38.0, 40.0, 42.0, 44.0

DIMENSIONS & WEIGHTS (NOMINAL)

SIZE	MODEL NO.	X LENGTH	Y WIDTH	WEIGHT (LBS.)
1-1/2"	494_	2.5	2.0	2.0
2"		4.2	2.5	2.0

MODEL NUMBER SELECTION

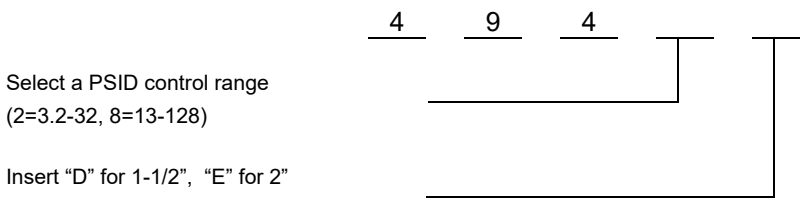

NOTES

¹ Head Loss in Feet is provided for pump head calculations. (1 PSI = 2.307 Feet of Water)
 Replaces form F-4091C

This specification © 2005 Griswold Controls

2803 Barranca Parkway, Irvine, CA 92606
 (949) 559-6000 Fax (949) 559-6088
 www.GriswoldControls.com

12/05
 F-4091D



THREADED CFR: PRESSURE & TEMPERATURE LIMITS

This Pressure vs. Temperature chart can be used to determine if specific Griswold Constant Flow Regulator models and mountings are compatible with your application.

Please contact your local Representative or Griswold Controls for pressure and temperature requirements above and below the limits shown.

