 <p>QuickSet®: Manual Balance Valve</p> <p>Optional Accessory Flange: Carbon Steel Spool with one or three ports for accessories (Up to 8" Size Only)</p> <p>Flanged Strainer and Butterfly: Y-Strainer & Butterfly Valve with PT & Drain Valve</p>	<p>LINE SIZE: (QuickSet and Strainer Size)</p> <input type="checkbox"/> 2-1/2" <input type="checkbox"/> 10" <input type="checkbox"/> 3" <input type="checkbox"/> 12" <input type="checkbox"/> 4" <input type="checkbox"/> 5" <input type="checkbox"/> 6" <input type="checkbox"/> 8"	<p>ATC SIZE:</p> <input type="checkbox"/> 2-1/2" <input type="checkbox"/> 6" <input type="checkbox"/> 3" <input type="checkbox"/> 8" <input type="checkbox"/> 4" <input type="checkbox"/> 10" <input type="checkbox"/> 5" <input type="checkbox"/> 12" <input type="checkbox"/> No ATC <p>REDUCER:</p> <input type="checkbox"/> Yes <input type="checkbox"/> No
	<p>ACCESSORY FLANGE SIZE:</p> <input type="checkbox"/> Same as Line <input type="checkbox"/> Same as ATC (Up to 8" Size Only)	<p>ACCESSORY FLANGE PORT:</p> <input type="checkbox"/> One 1/4" NPT <input type="checkbox"/> Two 1/4" NPT and one 3/4" NPT
	<p>QUICKSET PORT:</p> <input type="checkbox"/> Two 1/4" PT Test Valves ¹ <input type="checkbox"/> Two 1/4" PT Test Valves NPT and additional ports for accessories (1/4", 1/2", and 3/4")	

SPECIFICATIONS

QuickSet®: Valve housing is carbon steel SA-53 Grade B with a carbon steel low loss venturi, Piezo-ring, and a butterfly valve outlet. Valve body has two ports with Pressure/Temperature (P/T) Test Valves. Additional ports are optional. Flanges are mechanically compatible with ANSI B16.5-1968 150lb steel flanges. PSI/Temp Rating: 200PSI/275°F

Butterfly Valve²: Butterfly has ductile iron body, aluminum-bronze disc, EPDM seals, and infinite adjustable plate to set valve. Shaft is 316/416 SS. 2-1/2"-6" 8"-12" have a wheel handle. PSI/Temp Rating: 200PSI/275°F

Flanged Strainer: Strainer housing is ductile iron with 304 SS screen. Flanges are mechanically compatible with ANSI B16.5-1968 150lb steel flanges. Includes four ports with one P/T Test Valve (2-1/2" – 8" only), and one Ball Valve as a drain. PSI/Temp Rating: 232PSI/200°F

Accessory Flange (Optional)²: Housing is carbon steel SA-53 Grade B. Flanges are mechanically compatible with ANSI B16.5-1968 150lb steel flanges. Includes one port with P/T Test Valve OR three ports with one P/T Test Valve and two plugs (1/4" and 3/4") or Manual AirVent and Drain Valve. PSI/Temp Rating: 125PSI/250°F.

Reducer Flange (Optional when QuickSet or Strainer is larger than Control Valve or Coil)²: Housing is carbon steel SA-53 Grade B. Flanges are mechanically compatible with ANSI B16.5-1968 150lb steel flanges. PSI/Temp Rating: 125PSI/250°F.


ATC Control Valve: Supplied and installed by others.

NOTES

¹ All 4" Pressure/Temperature Test Valves are shipped loose to be installed in the field.

² Butterfly Valves are installed to mating product. All other flanged connections are shipped loose in the piping package kit for field installation. Bolts, nuts, and gaskets are supplied in the field.

MODEL NUMBER SELECTION

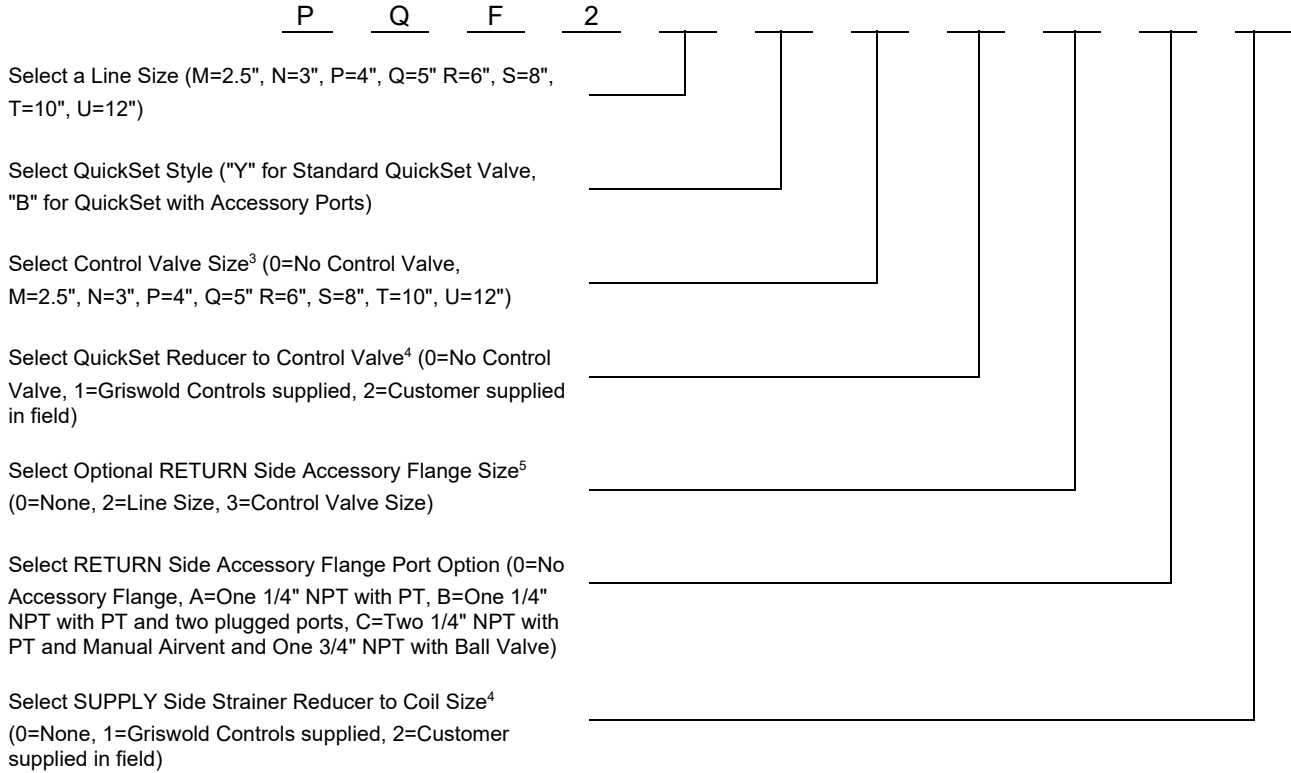

FLOW RATES (+/-1%⁶)

LINE SIZE	Cv QuickSet	Cv QuickSet with Accessory	GPM RANGE FOR 5-100" ⁷ W.C. ΔP (SET W/100" GAUGE)	GPM RANGE FOR 5-300" W.C. ΔP (SET W/300" GAUGE)	Turn Down Ratio
2-1/2"	135	134	19 – 87	19 – 151	7.9
3"	201	189	32 – 147	32 – 255	7.9
4"	417	387	58 – 260	58 – 451	7.8
5"	630	566	80 – 372	80 – 645	8.1
6"	980	782	140 – 624	140 – 1075	7.7
8"	1745	1561	260 – 1180	260 – 2045	7.8
10"	3201	3149	375 – 1610	375 – 2790	7.4
12"	4690	4232	600 – 2790	600 – 4820	8.0

NOTES

- ³ Control Valve Supplied and Installed by others.
- ⁴ Reducer available for one line size reduction 3" to 8" QuickSet or Strainer only.
- ⁵ Accessory Flange available up to 8" size only.
- ⁶ Accuracy is for venturi portion of valve only. Pressure readability is dependent on accuracy of gauge and system pressure stability.
- ⁷ Not all gages/meters can accurately show a 5" signal. Readability is dependent on quality of the meter. Digital gages can read below 1".

This specification © 2023 Griswold Controls

1700 Barranca Parkway, Irvine, CA 92606
 (949) 559-6000 Fax (949) 559-6088
 www.GriswoldControls.com

