



# Griswold Controls Energy FIT System

*Energy-Saving Pressure Independent Temperature Control System  
DN50-250 / 2"-10"*



## FEATURES AND BENEFITS

The Griswold Energy FIT System is the world's first pressure independent temperature controlling regulation valve. With the FIT System you will get monitoring, measuring, connectivity and control in one package including PICV valve, sensor kit and the Intelligent Interface.

The FIT System measures energy usage while monitoring performance and adjusts the PICV valve to optimize coil performance. The PICV valve maintains the correct flow, despite pressure changes, and guarantees that flow and actuator position will only change when demand requirements change or  $\Delta T$  is outside specification. The FIT System is suitable for any sub-metering application.

With FIT's SMART control logic, room temperature (i.e. human comfort) will be prioritized as long as temperature is outside user specifications. Once within,  $\Delta T$  control will be prioritized and flow rates may be reduced, providing significant energy savings.

- **State-of-the-art** - Pressure independent temperature control.
- **All-in-one** including PICV, temperature and pressure sensors, flow meter and energy meter for sub-metering applications.
- **User friendly** with **easy** setting.
- **Cost savings** due to optimized energy consumption and improved efficiency.
- **Complete overview** of energy and flow.
- **Simple monitoring** via Bluetooth® or BACnet to BMS.
- **Clear information** regarding  $\Delta T$ ,  $\Delta P$ , flow rate and energy heat transfer.
- **Flexible solution** - also allowing upside-down installation.
- **No piping restriction** and most **compact** system on the market.

## TABLE OF CONTENTS

|   |    |
|---|----|
| Features and benefits .....                           | 1  |
| Table of contents .....                               | 2  |
| Specification .....                                   | 3  |
| PICV valve .....                                      | 3  |
| FlowCon PICV actuator (SM.0.0.1.3 / SM.0.0.1.4) ..... | 4  |
| FlowCon PICV actuator BACnet (SM.0.0.0.6) .....       | 5  |
| FlowCon Intelligent Interface .....                   | 5  |
| Temperature sensors (T1 and T2) .....                 | 6  |
| Pressure sensors (P1 and P2) .....                    | 6  |
| Dimensions and weight .....                           | 7  |
| Model number selection .....                          | 8  |
| Wiring instruction .....                              | 9  |
| Description .....                                     | 11 |
| Flow rate setting .....                               | 12 |
| FlowCon SM.0.0.1.3 / SM.0.0.1.4 Actuators .....       | 12 |
| FlowCon SM.0.0.0.6 Actuator .....                     | 13 |
| Control curve at maximum pre-setting .....            | 14 |
| Flange match PICV housing .....                       | 14 |
| General specifications .....                          | 15 |
| Pressure independent temperature control system ..... | 15 |
| Valve actuator .....                                  | 15 |
| Valve housing .....                                   | 15 |
| Flow regulation unit .....                            | 16 |
| Intelligent interface / electronic unit .....         | 16 |
| Temperature sensor .....                              | 16 |
| Pressure sensor .....                                 | 16 |
| Application and schematic example .....               | 17 |
| Updates .....   | 17 |



## SPECIFICATION

### PICV valve

|                                       |  |
|---------------------------------------|--|
| Static pressure:                      | 4000 kPa / 580 psi   |
| Ambient temperature:                  | -10°C to +50°C / +14°F to +122°F   |
| Media temperature:                    | -20°C to +120°C / -4°F to +248°F   |
| Material:                             |  |
| • Housing and covers:                 | Ductile iron ASTM A395 Grade 60-40-18  |
| • Composite components (internal):    | PPS (glass-reinforced) / PE / PC / POM   |
| • Metal components (internal):        | Stainless steel  |
| • Stem seal and O-rings:              | EPDM   |
| • Diaphragm:                          | HNBR   |
| • Bracket:                            | PA   |
| • Snap ring:                          | PE   |
| Stroke:                               | FIT.3.0-FIT.5.2: 2160°<br>FIT.6.2: 3600°   |
| Maximum close off pressure:           | 800 kPa / 116 psi  |
| Maximum operational ΔP:               | 800 kPaD / 116 psid  |
| Maximum allowable operating pressure: | 1600 kPaD / 232 psid   |
| Control characteristic:               | Linear flow  |
| Rangeability:                         | >100:1   |
| Turn down ratio:                      | >100:1   |
| Shut-off leakage:                     | ANSI / FCI 70-2 2006 / IEC 60534-4 - Class IV  |
| Flow rate range:                      | 0.0416-76.8 l/sec / 0.659-1220 GPM   |
| End connection:                       | Universal flange connections which can be used with both ISO and ANSI flanges. Mounting kits are not supplied by FlowCon |
| Housing taps:                         | 1/4" ISO   |



## SPECIFICATIONS

### FlowCon PICV actuator<sup>1</sup>

#### FlowCon SM.0.0.1.3 (standard)

#### FlowCon SM.0.0.1.4 (standard failsafe)

#### FlowCon SM.0.0.0.6 (BACnet failsafe)

|                          |   |
|--------------------------|---|
| Supply voltage:          |   |
| • SM.0.0.1.3/4:          | 24V AC ±20%, 50/60 Hz or 24V DC ±20%  |
| • SM.0.0.0.6:            | 22-26V AC, 50/60Hz or 22-26V DC   |
| Type:                    | Electrical, Bi-directional synchronous motor  |
| Power consumption:       |   |
| • SM.0.0.1.3:            | 24V AC: 2.2VA standby / 3.8VA operating / 15VA max<br>24V DC: 1.0W standby / 1.7W operating / 8.0W max  |
| • SM.0.0.1.4:            | 24V AC: 3.3VA standby / 4.5VA operating / 15VA max<br>24V DC: 2.0W standby / 3.0W operating / 8.0W max  |
| • SM.0.0.0.6:            | 22-26V AC: 3.5VA standby / 5.0VA operating / 12VA max   |
| Control signal:          | Analog 2-10V DC   |
| Resolution:              | 1:800 (2-10V analog)  |
| Feedback:                | Linear flow   |
|                          | Auto (equal to analog control signal) or 2-10V DC   |
| Control mode:            | Linear flow   |
| Supply voltage failsafe: |   |
| • SM.0.0.1.3:            | Fail in place   |
| • SM.0.0.1.4:            | Fail in place or settable 0-100% open   |
| • SM.0.0.0.6:            | Optional open or close  |
| Control signal failsafe: |   |
| • SM.0.0.1.3/4:          | Fail in place or settable 0-100% open   |
| Manuel override:         | Yes   |
| Position indicator:      | No  |
| Operation time:          |   |
| • FlowCon valve SM.3-5:  | 190 sec (from closed to fully open valve)   |
| • FlowCon valve SM.6:    | 317 sec (from closed to fully open valve)   |
| Actuating force:         |   |
| • SM.0.0.1.3/4:          | 9 Nm opening / 7.5 Nm closing   |
| • SM.0.0.0.6:            | 8 Nm opening / 7.0 Nm closing   |
| Stroke:                  |   |
| • FlowCon valve SM.3-5:  | 2160°   |
| • FlowCon valve SM.6:    | 3600°   |
| Ambient temperature:     | -10°C to +50°C / +14°F to +122°F  |
| Humidity rating:         | 5..95% rH, no condensation  |
| Protection:              | IP54 including upside-down mounting   |
| CE conformity:           | EN 60730, class II  |
| Calibration:             | Automatic at startup  |
| Cable:                   |   |
| • SM.0.0.1.3/4:          | Fixed, 5 wires x 0.75 mm <sup>2</sup> / AWG18, halogen free, 1 meter / 3 ft   |
| • SM.0.0.0.6:            | Fixed, 5 wires x 0.75 mm <sup>2</sup> / AWG18, halogen free, 1 meter / 3 ft<br>Fixed, 3 wires x 0.75 mm <sup>2</sup> / AWG18, halogen free, 1 meter / 3 ft (BACnet) |
| Material:                |   |
| • Cover, top:            | PA (glass-reinforced), UL94, V0 rated   |
| • Cover, bottom:         | PC (glass-reinforced), UL94, V0 rated   |
| • Spindle adaptor:       | Brass and EPDM  |
| Valve-actuator coupling: | Easy snap coupling  |
| Programming:             |   |
| • SM.0.0.1.3/4:          | Programming of all settings on interface with buttons and display   |
| • SM.0.0.0.6:            | Programming of all settings on interface with buttons and display or via BACnet   |

Note 1: FlowCon warranty is voided using other actuators than supplied or recommended by FlowCon International.



## SPECIFICATIONS

### **BACnet (SM.0.0.0.6)**

|                             |  |
|-----------------------------|--|
| Protocol:                   | BACnet MS/TP   |
| Interface:                  | EIA-485 / RS-485   |
| Device profile:             | BACnet Application Specific Controller (B-ASC) type server |
| Baud rates supported:       | 9600, 19200, 38400, 76800 and 115200                       |
| Services (BIBBS) supported: | DS-RP-B, DS-WP-B, DM-DDB-B, DM-DOB-B and DM-DCC-B          |
| BACnet fallback action:     | Yes  |
| Participants:               | Up to 32 recommended, max. 127 participants                |
| Load:                       | 1/8  |

### **FlowCon Intelligent Interface**

|                             |  |
|-----------------------------|--|
| Supply voltage:             | 24V AC/DC  |
| Power consumption:          | 4W   |
| Control signal:             | 2-10V DC   |
| Output:                     | 2-10V DC   |
| Humidity rating:            | 5..95% rH, no condensation   |
| Protection:                 | IP54 including upside-down mounting  |
| CE conformity:              | Yes  |
| Cable, 3 groups:            |  |
| • Group 1:                  | fixed, 1 wire with quick-connector, 3 meter / 9 ft (T1)<br>fixed, 1 wire with quick-connector, 1 meter / 3 ft (T2)<br>fixed, 3 wires 0.6 meter / 2 ft (analog actuator communication)  |
| • Group 2:                  | fixed, 2 wires 0.6 meter / 2 ft (power and ground)<br>fixed, 3 wires 0.6 meter / 2 ft (BACnet BMS Communication)   |
| • Group 3:                  | fixed, 1 wire with quick-connector, 1 meter / 3 ft (P1)<br>fixed, 1 wire with quick-connector, 1 meter / 3 ft (P2)<br>fixed, 3 wires, 0.6 meter / 2 ft (BACnet actuator communication) |
| Material:                   |  |
| • Cover, top:               | PA (glass-reinforced), UL94, V0 rated  |
| • Cover, bottom:            | PC (glass-reinforced), UL94, V0 rated  |
| • Bracket:                  | St 37-2, powder coated   |
| Protocol:                   | BACnet MS/TP   |
| Interface:                  | EIA-485 / RS-485   |
| Device profile:             | BACnet Application Specific Controller (B-ASC) type server   |
| Baud rates supported:       | 9600, 19200, 38400, 57600, 76800 and 115200  |
| Services (BIBBS) supported: | DS-RP-B, DS-WP-B, DM-DDB-B, DM-DOB-B, DM-DCC-B, DS-RPM-B and DM-RD-B   |
| Participants:               | Up to 32 recommended, max. 127 participants  |
| Load:                       | 1/8  |



## SPECIFICATIONS

### Temperature sensors (T1 and T2)

|                        |  |
|------------------------|--|
| Supply voltage:        | NA   |
| Cable:                 | No cable, but with quick-connector   |
| Output:                | Resistive  |
| Media temperature:     | -20°C to +120°C / -4° to +248°F  |
| Working pressure:      | 40 bar / 580 psi   |
| Housing material:      | AISI 304   |
| Protection:            | IP65   |
| Probe length:          | DN50-80: 12.7 mm / 0.5 in<br>DN80-250: 84.7 mm / 3.3 in<br>use of sensor pocket is recommended |
| Probe diameter:        | 6 mm / 0.236 in  |
| CE conformity:         | Yes  |
| Connection:            | 1/4" ISO   |
| Performance data:      |  |
| • Sensor type:         | PT1000   |
| • Accuracy:            | 0.5% FS (Full Scale)   |
| • Linearity:           | ±0.5% FS (Full Scale)  |
| • Long time stability: | 0.1% FS (Full Scale)   |
| • Response time:       | at 50°C (122°F): 2.3 sec / at 90°C (194°F): 5.4 sec.   |

### Pressure sensors (P1 and P2)

|                               |   |
|-------------------------------|---|
| Supply voltage:               | 12V DC  |
| Cable:                        | No cable, but with quick-connector  |
| Output:                       | 4-20mA  |
| Media temperature:            | -10°C to +85°C / +14°F to +185°F  |
| Pressure range <sup>2</sup> : | 0-25 bar / 0-360 psi  |
| Housing material:             | AISI 304  |
| Protection:                   | IP65  |
| CE conformity:                | Yes   |
| Connection:                   | 1/4" ISO  |
| Performance data:             |   |
| • Accuracy:                   | ±1.5% FS (Full Scale) (tolerances can be software compensated in the Griswold Controls Intelligent Interface) |
| • Stability:                  | 0.5% FS (Full Scale) ±0.05%   |
| • Thermal effect on zero:     | ±0.1% FS (Full Scale)   |
| • Thermal effect on span:     | ±0.05% FS (Full Scale)  |
| • Electronic proof:           | Short circuit protection  |
| • Response time:              | <20 msec (20 sec mean value calculated in the Griswold Controls Intelligent Interface)                        |


Note 2: Calibrated at factory at 24V DC



## DIMENSIONS AND WEIGHT

| Model no.                     | Valve size<br>mm (in)   | PICV Valve     |               |                |                | Weight <sup>3</sup><br>kg (lb) |
|-------------------------------|-------------------------|----------------|---------------|----------------|----------------|--------------------------------|
|                               |                         | L1<br>mm (in)  | L2<br>mm (in) | H1<br>mm (in)  | H2<br>mm (in)  |                                |
| FIT.3.0<br>FIT.3.1<br>FIT.3.2 | 50/65/80<br>(2-2 1/2-3) | 224<br>(8.82)  | 338<br>(13.3) | 252<br>(9.92)  | 95<br>(3.74)   | 13.9<br>(30.6)                 |
| FIT.4.1<br>FIT.4.2            | 80/100<br>(3-4)         | 320<br>(12.60) | 338<br>(13.3) | 292<br>(11.50) | 135<br>(5.31)  | 30.4<br>(67.0)                 |
| FIT.4.3                       | 80/100<br>(3-4)         | 320<br>(12.60) | 338<br>(13.3) | 292<br>(11.50) | 135<br>(5.31)  | 33.2<br>(73.2)                 |
| FIT.5.1<br>FIT.5.2            | 125/150<br>(5-6)        | 422<br>(16.61) | 338<br>(13.3) | 343<br>(13.50) | 180<br>(7.09)  | 60.3<br>(133)                  |
| FIT.6.2                       | 200/250<br>(8-10)       | 725<br>(28.54) | 338<br>(13.3) | 472<br>(18.58) | 292<br>(11.50) | 249<br>(548)                   |

Note 3: Weight includes PICV valve, PICV actuator (standard), Intelligent Interface and sensor kit.

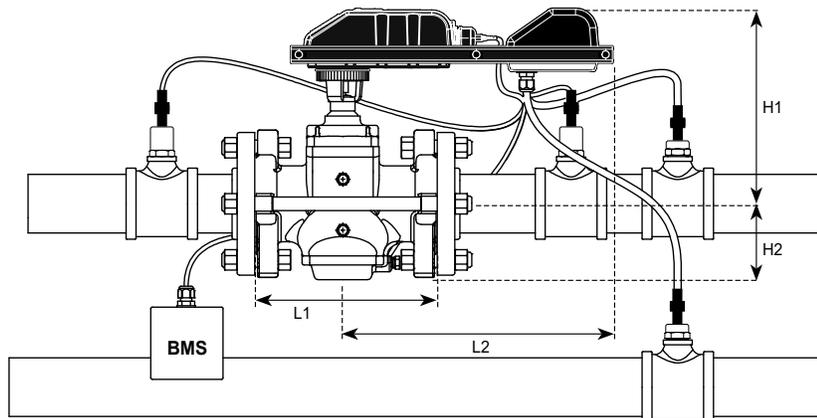

Griswold Controls FIT.3



## MODEL NUMBER SELECTION

**FIT . . . . . B . . . . . 0 . 0 . 2**

Housing size:

- 3** = DN50-80 / 2"-3"
- 4** = DN80-100 / 3"-4"
- 5** = DN125-150 / 5"-6"
- 6** = DN200-250 / 8"-10"

Control range:

- 0** = 30-800 kPaD / 4.4-116 psid (FIT.3 only)
- 1** = 30-800 kPaD / 4.4-116 psid  
(not available on size DN200-250, 8"-10")
- 2** = 35-800 kPaD / 5.1-116 psid
- 3** = 50-800 kPaD / 7.3-116 psid (FIT.4 only)

P/t plug requirements:

- B** = p/t plugs (standard)

Type of actuator:

- 3** = standard (SM.0.0.1.3)
- 4** = standard and failsafe (SM.0.0.1.4)
- 6** = BACnet and failsafe (SM.0.0.0.6)

Sensor kit:

- 2** = PICV valve, pressure/temperature sensor kit, Bluetooth® and ΔT control


### 1 actuator bracket included (standard)

Example:

**FIT.3.1.B.6.0.0.2** = Griswold Controls Energy FIT System DN50/65/80 (2" / 2 1/2" / 3"), 30-800 kPaD (4.4-116 psid) with p/t plugs, BACnet/failsafe actuator, pressure/temperature sensor kit, Bluetooth® and ΔT control incl. actuator bracket included (standard).




# WIRING INSTRUCTION

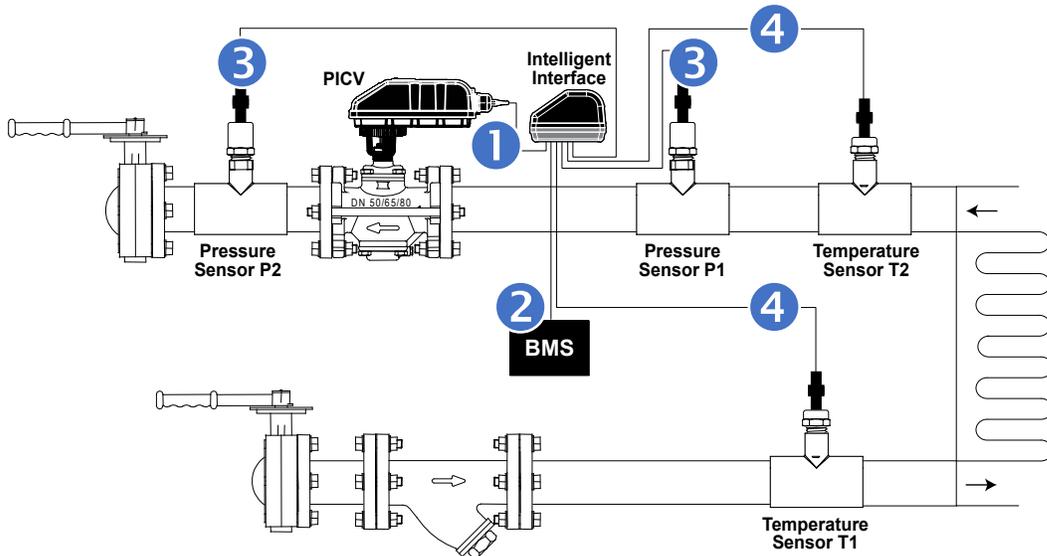

1


**PICV**  
SM.0.0.1.3/4

**Intelligent Interface**

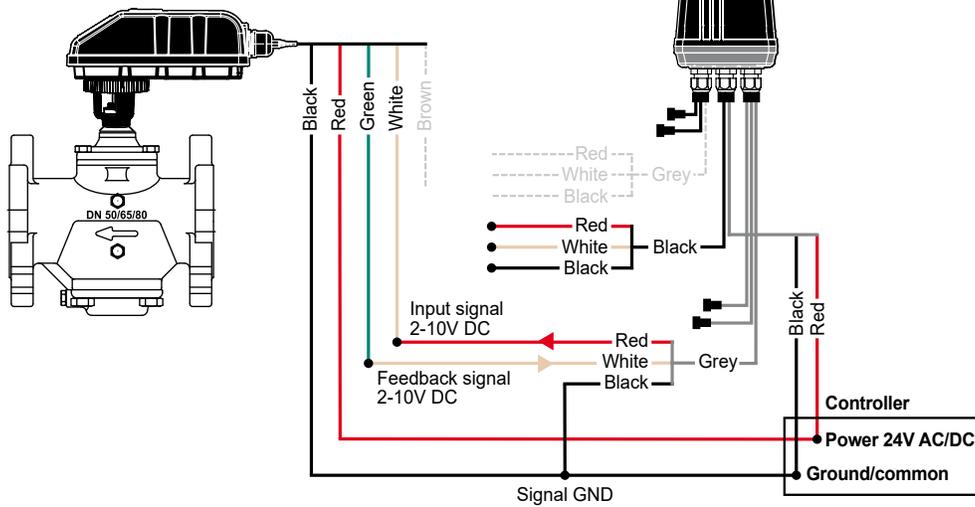

**PICV**  
SM.0.0.0.6

**Intelligent Interface**

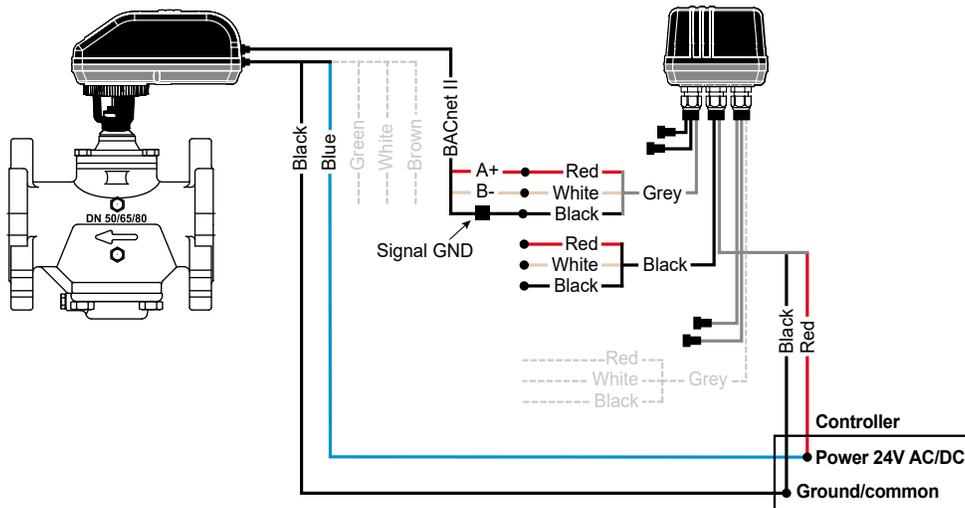





## DESCRIPTION

The Griswold Controls Energy FIT System measures energy usage while monitoring performance to adjust the PICV to optimize chiller performance. The PICV maintains the correct flow despite pressure changes and guarantees that flow and actuator position only change when demand requirements change or water  $\Delta T$  is outside of specification.

The Griswold Controls FIT is fully customizable and allows selection of components that work best to optimize the application's unique energy goals. It consists of a FIT Intelligent Interface and a SM actuator. The FIT Interface has control logics based on sensor inputs and feedback from the actuator. The sensors used for the FIT System are two PT1000 temperature sensors and two 25 bar pressure sensors measuring relative to atmospheric pressure.

The temperature sensors provide the Griswold Controls FIT with measurements of up- and downstream temperature, and the pressure sensors measure the  $\Delta P$  across the PICV allowing the BMS to reduce system pressure to save pump energy when pressure drop is higher than the PICV's requirements.

When the FIT System is set up with pressure and temperature sensors, inlet- and outlet temperatures, static and differential pressures, flow rate and BTU/kWh will be readable in the Building Management System through the BACnet objects. Also, the control objects can be controlled through the BACnet interface. For full detailed information, please see Griswold Controls FIT BACnet PICS.

If combined, a BACnet compatible SM actuator and the FIT Intelligent Interface will give you access to remote programming of the SM actuator via BACnet. Furthermore, notifications from the SM actuator are routed through the FIT to the BMS system for remote monitoring. In addition, the BACnet compatible SM actuator will show a variety of information incl. sensor data in its display for local access.

There are 3 main control modes for the FIT module: direct  $\Delta T$  Control, direct Comfort Control, and Smart Control.  $\Delta T$  Control adjusts the flow through the valve with the aim of maintaining a set design  $\Delta T$  in the hydraulic system. Comfort Control allows you to adjust the control signal of the actuator directly and thereby control water flow rate like a standard control valve. And Smart Control uses a dual layer control characteristic. The main control is changing the flow to optimize the room temperature relative to the room temperature target. When the room temperature is within the accepted range, the  $\Delta T$  control is activated to optimize the water  $\Delta T$ .

Finally, the Griswold Controls Energy FIT System has local Bluetooth® access in immediate vicinity of the FIT Interface that can be used through the Griswold Controls App. The Griswold Controls Intelligent Interface calculates the BTU and displays the data via Bluetooth® on an Android or iPhone mobile device. In the Griswold Controls App you may connect to the FIT System by tapping "Connection" and "Search" for Griswold Controls systems around. Follow the steps in the App menu and press "Add". This way, you can monitor T1, T2,  $\Delta T$ , P1, P2,  $\Delta P$ , Flow, BTU/kWh and  $\Delta T$  target.





## FLOW RATE SETTING<sup>4</sup>

### FlowCon SM.0.0.1.3 / SM.0.0.1.4 Actuators

| Griswold FIT.3.X          | Flow Rate Setting Table - FlowCon SM.0.0.1.3/4 Actuators |       |       |                            |       |      |                            |       |      |
|---------------------------|--|-------|-------|----------------------------|-------|------|----------------------------|-------|------|
|                           | Valve size: DN50-80 / 2"-3"                              |       |       |                            |       |      |                            |       |      |
| Pressure range, ΔP:       | 30-800 kPaD / 4.4-116 psid                               |       |       | 30-800 kPaD / 4.4-116 psid |       |      | 35-800 kPaD / 5.1-116 psid |       |      |
|                           | FIT.3.0  |       |       | FIT.3.1                    |       |      | FIT.3.2                    |       |      |
|                           | l/sec  | l/hr  | GPM   | l/sec                      | l/hr  | GPM  | l/sec                      | l/hr  | GPM  |
| Lowest settable max flow  | 0.0416   | 150   | 0.659 | 0.0715                     | 257   | 1.13 | 0.0989                     | 356   | 1.57 |
| Increments                | 0.0416   | 150   | 0.659 | 0.0715                     | 257   | 1.13 | 0.0989                     | 356   | 1.57 |
| Highest settable max flow | 4.16   | 15000 | 65.9  | 7.15                       | 25700 | 113  | 9.89                       | 35600 | 157  |

| Griswold FIT.4.X          | Flow Rate Setting Table - FlowCon SM.0.0.1.3/4 Actuators |       |      |                            |       |      |                            |       |      |
|---------------------------|--|-------|------|----------------------------|-------|------|----------------------------|-------|------|
|                           | Valve size: DN80-100 / 3"-4"                             |       |      |                            |       |      |                            |       |      |
| Pressure range, ΔP:       | 30-800 kPaD / 4.4-116 psid                               |       |      | 35-800 kPaD / 5.1-116 psid |       |      | 50-800 kPaD / 7.3-116 psid |       |      |
|                           | FIT.4.1  |       |      | FIT.4.2                    |       |      | FIT.4.3                    |       |      |
|                           | l/sec  | l/hr  | GPM  | l/sec                      | l/hr  | GPM  | l/sec                      | l/hr  | GPM  |
| Lowest settable max flow  | 0.0938   | 338   | 1.49 | 0.142                      | 510   | 2.25 | 0.202                      | 727   | 3.20 |
| Increments                | 0.0938   | 338   | 1.49 | 0.142                      | 510   | 2.25 | 0.202                      | 727   | 3.20 |
| Highest settable max flow | 9.38   | 33800 | 149  | 14.2                       | 51000 | 225  | 20.2                       | 72700 | 320  |

| Griswold FIT.5.X          | Flow Rate Setting Table - FlowCon SM.0.0.1.3/4 Actuators |       |      |                            |        |      |      |
|---------------------------|--|-------|------|----------------------------|--------|------|------|
|                           | Valve size: DN125-150 / 5"-6"                            |       |      |                            |        |      |      |
| Pressure range, ΔP:       | 30-800 kPaD / 4.4-116 psid                               |       |      | 35-800 kPaD / 5.1-116 psid |        |      |      |
|                           | FIT.5.1  |       |      | FIT.5.2                    |        |      |      |
|                           | l/sec  | l/hr  | GPM  | l/sec                      | l/hr   | GPM  | GPM  |
| Lowest settable max flow  | 0.233  | 838   | 3.69 | 0.295                      | 1060   | 4.68 | 4.68 |
| Increments                | 0.233  | 838   | 3.69 | 0.295                      | 1060   | 4.68 | 4.68 |
| Highest settable max flow | 23.3   | 83800 | 369  | 29.5                       | 106000 | 468  | 468  |

| Griswold FIT.6.2          | Flow Rate Setting Table - FlowCon SM.0.0.1.3/4 Actuators |        |      |
|---------------------------|--|--------|------|
|                           | Valve size: DN200-250 / 8"-10"                           |        |      |
| Pressure range, ΔP:       | 35-800 kPaD / 5.1-116 psid                               |        |      |
|                           | FIT.6.2  |        |      |
|                           | l/sec  | l/hr   | GPM  |
| Lowest settable max flow  | 0.768  | 2770   | 12.2 |
| Increments                | 0.768  | 2770   | 12.2 |
| Highest settable max flow | 76.8   | 277000 | 1220 |

**Note 4:**

Accuracy: Greatest of either ±5% of the controlled flow or ±2% of the maximum flow applies for SM.3.x–SM.5.x at flow rates between 35% and 100% of rated valve capacity, and for FIT.6.2 at flow rates between 12% and 100% of rated valve capacity.

Griswold recommends valve's max flow to minimum 50% of rated valve capacity.

Above table indicates settable max flow defining the flow through the valve at maximum control signal, normally 10V.



## FLOW RATE SETTING<sup>5</sup>

### FlowCon SM.0.0.0.6 Actuator

| Griswold FIT.3.X          | Flow Rate Setting Table - FlowCon SM.0.0.0.6 Actuators |       |      |                            |       |      |                            |       |      |
|---------------------------|--|-------|------|----------------------------|-------|------|----------------------------|-------|------|
|                           | Valve size: DN50-80 / 2"-3"                            |       |      |                            |       |      |                            |       |      |
| Pressure range, ΔP:       | 30-800 kPaD / 4.4-116 psid                             |       |      | 30-800 kPaD / 4.4-116 psid |       |      | 35-800 kPaD / 5.1-116 psid |       |      |
|                           | FIT.3.0  |       |      | FIT.3.1                    |       |      | FIT.3.2                    |       |      |
|                           | l/sec  | l/hr  | GPM  | l/sec                      | l/hr  | GPM  | l/sec                      | l/hr  | GPM  |
| Lowest settable max flow  | 1.48   | 5310  | 23.4 | 2.57                       | 9240  | 40.7 | 3.55                       | 12800 | 56.3 |
| Estimated increments      | 0.0536   | 194   | 0.85 | 0.0916                     | 329   | 1.45 | 0.127                      | 456   | 2.01 |
| Highest settable max flow | 4.16   | 15000 | 65.9 | 7.15                       | 25700 | 113  | 9.89                       | 35600 | 157  |

| Griswold FIT.4.X          | Flow Rate Setting Table - FlowCon SM.0.0.0.6 Actuators |       |      |                            |       |      |                            |       |      |
|---------------------------|--|-------|------|----------------------------|-------|------|----------------------------|-------|------|
|                           | Valve size: DN80-100 / 3"-4"                           |       |      |                            |       |      |                            |       |      |
| Pressure range, ΔP:       | 30-800 kPaD / 4.4-116 psid                             |       |      | 35-800 kPaD / 5.1-116 psid |       |      | 50-800 kPaD / 7.3-116 psid |       |      |
|                           | FIT.4.1  |       |      | FIT.4.2                    |       |      | FIT.4.3                    |       |      |
|                           | l/sec  | l/hr  | GPM  | l/sec                      | l/hr  | GPM  | l/sec                      | l/hr  | GPM  |
| Lowest settable max flow  | 3.49   | 12600 | 55.4 | 4.73                       | 17000 | 75.0 | 3.68                       | 13300 | 58.3 |
| Estimated increments      | 0.118  | 424   | 1.87 | 0.189                      | 680   | 3.00 | 0.330                      | 1190  | 5.23 |
| Highest settable max flow | 9.38   | 33800 | 149  | 14.2                       | 51000 | 225  | 20.2                       | 72700 | 320  |

| Griswold FIT.5.X          | Flow Rate Setting Table - FlowCon SM.0.0.0.6 Actuators |       |      |                            |        |      |      |
|---------------------------|--|-------|------|----------------------------|--------|------|------|
|                           | Valve size: DN125-150 / 5"-6"                          |       |      |                            |        |      |      |
| Pressure range, ΔP:       | 30-800 kPaD / 4.4-116 psid                             |       |      | 35-800 kPaD / 5.1-116 psid |        |      |      |
|                           | FIT.5.1  |       |      | FIT.5.2                    |        |      |      |
|                           | l/sec  | l/hr  | GPM  | l/sec                      | l/hr   | GPM  | GPM  |
| Lowest settable max flow  | 6.48   | 23300 | 103  | 7.10                       | 25600  | 113  | 113  |
| Estimated increments      | 0.336  | 1210  | 5.32 | 0.448                      | 1610   | 7.10 | 7.10 |
| Highest settable max flow | 23.3   | 83800 | 369  | 29.5                       | 106000 | 468  | 468  |

| Griswold FIT.6.2          | Flow Rate Setting Table - FlowCon SM.0.0.0.6 Actuators |        |      |
|---------------------------|--|--------|------|
|                           | Valve size: DN200-250 / 8"-10"                         |        |      |
| Pressure range, ΔP:       | 35-800 kPaD / 5.1-116 psid                             |        |      |
|                           | FIT.6.2  |        |      |
|                           | l/sec  | l/hr   | GPM  |
| Lowest settable max flow  | 9.21   | 33100  | 146  |
| Estimated increments      | 0.750  | 2710   | 11.9 |
| Highest settable max flow | 76.8   | 277000 | 1220 |

**Note 5:**


Accuracy: Greatest of either ±5% of the controlled flow or ±2% of the maximum flow applies for SM.3.x–SM.5.x at flow rates between 35% and 100% of rated valve capacity, and for FIT.6.2 at flow rates between 12% and 100% of rated valve capacity.

Griswold recommends valve's max flow to minimum 50% of rated valve capacity.

Above table indicates settable max flow defining the flow through the valve at maximum control signal, normally 10V.



## CONTROL CURVE AT MAXIMUM PRE-SETTING<sup>6</sup>

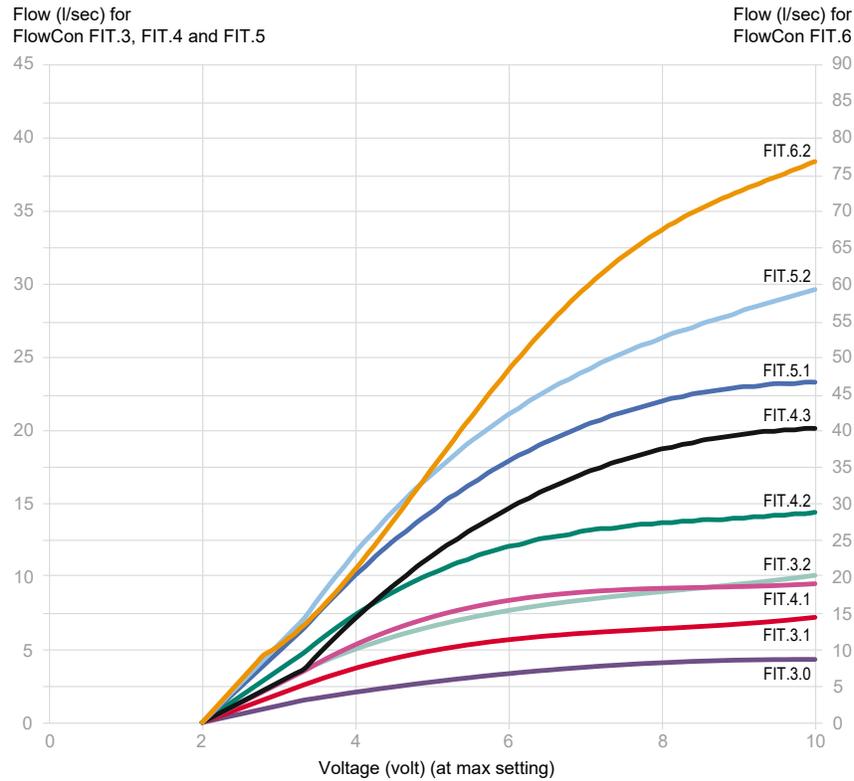

Note 6: Above curves show the control curve of the valves in maximum allowed pre-setting condition and may vary if lower pre-settings are selected. The valves will always have 1000 positions between the pre-set flow value and 0V if control range is selected to 0-10V.

## FLANGE MATCH PICV HOUSING

| Model no. | Flange size (inch) | ASME B16.5 weld neck |           | Flange size (mm) | EN1092-1 weld neck |      |      |      |
|-----------|--------------------|----------------------|-----------|------------------|--------------------|------|------|------|
|           |                    | Class 150            | Class 300 |                  | PN10               | PN16 | PN25 | PN40 |
| FIT.3.X   | 2                  |                      |           | 50               | ✓                  | ✓    | ✓    | ✓    |
|           | 2 1/2              | ✓                    | ✓         | 65               | ✓                  | ✓    | ✓    | ✓    |
|           | 3                  | ✓                    | ✓         | 80               | ✓                  | ✓    | ✓    | ✓    |
| FIT.4.X   | 3                  | ✓                    | ✓         | 80               | ✓                  | ✓    | ✓    | ✓    |
|           | 4                  | ✓                    | ✓         | 100              | ✓                  | ✓    | ✓    | ✓    |
| FIT.5.X   | 5                  | ✓                    | ✓         | 125              | ✓                  | ✓    | ✓    | ✓    |
|           | 6                  | ✓                    |           | 150              | ✓                  | ✓    | ✓    | ✓    |
| FIT.6.2   | 8                  |                      | ✓         | 200              |                    |      |      | ✓    |
|           | 10                 | ✓                    |           | 250              | ✓                  | ✓    | ✓    | ✓    |



## GENERAL SPECIFICATIONS

### 1. Pressure independent temperature control system - Griswold FIT

- 1.1. Contractor shall install where indicated in drawings.
- 1.2. System shall include a pressure independent dynamic control valve, a sensor kit and an electronic unit.
  - 1.2.1. The PICV valve shall accurately control flow independent of system pressure fluctuations.
  - 1.2.2. The sensor kit shall include 2 temperature sensors and 2 pressure sensors. Temperature sensors shall measure the  $\Delta T$  across the coil and pressure sensors shall measure the  $\Delta P$  across the PICV.
  - 1.2.3. The intelligent interface shall accurately change PICV flow to maintain target  $\Delta T$ . In addition, the electronic unit shall calculate BTU or kWh heat transfer and supply continuous information on  $\Delta T$ ,  $\Delta P$  and flow.
- 1.3. Housing shall be permanently marked to show direction of flow.

### 2. Valve actuator

#### 2.a FlowCon SM.0.0.1.3 / SM.0.0.1.4 Actuators

- 2.a.1. Valve-actuator coupling shall be snap coupling for fast mounting and de-mounting.
- 2.a.2. Actuator housing shall be rated to IP54 including upside-down mounting.
- 2.a.3. Actuator shall be driven by a 24V AC/DC motor and shall accept 2-10V control signal.
- 2.a.4. Actuator control mode shall be selectable to linear flow.
- 2.a.5. Actuator shall be capable of providing linear flow feedback signal to the control system. Feedback signal shall be selectable to Auto (equal to input signal) or 2-10V DC.
- 2.a.6. In case of lost control signal, actuator shall be capable of operating valve to any set 0-100% open position or remain in place.
- 2.a.7. Automatic calibration of valve position shall be standard.
- 2.a.8. Actuator shall include buttons for external programming of all settings with the valve in-line and system in operation.
- 2.a.9. Actuator display showing current valve flow, maximum valve flow, input signal, feedback signal, operational direction and control mode shall be standard.
- 2.a.10. Optional failsafe versions shall be available. In case of power failure, failsafe versions shall be capable of operating valve to any set 0-100% open position or remain in place.

OR

#### 2.b FlowCon SM.0.0.0.6 Actuator

- 2.b.1. Valve-actuator coupling shall be snap coupling for fast mounting and de-mounting.
- 2.b.2. Actuator housing shall be rated to IP54 including upside-down mounting.
- 2.b.3. Actuator shall be driven by a 24V AC/DC motor and shall accept 2-10V DC electric input signal.
- 2.b.4. Actuator shall be capable of providing linear feedback signal to the control system. Feedback signal shall be equal to input signal, 2-10V DC.
- 2.b.5. Automatic calibration of valve position shall be standard.
- 2.b.6. Actuator shall include buttons for external programming of all settings with the valve in-line and system in operation.
- 2.b.7. Actuator display showing current valve flow, maximum valve flow, input signal, feedback signal and operational direction shall be standard.
- 2.b.8. Failsafe version to power valve to either open (max. setting) or closed position from any position in case of power failure shall be standard.
- 2.b.9. BACnet version shall be standard. BACnet versions shall provide remote setting and control of actuator.

### 3. Valve housing

- 3.1. Housing shall consist of ductile iron ASTM A395 Grade 60-40-18 rated at no less than 4000 kPa (580 psi) static pressure and +120°C (+248°F).
- 3.2. Housing shall be for installation between flanges.
- 3.3. Pressure/temperature test plugs for verifying accuracy of flow performance shall be standard on all valve sizes.
- 3.4. Identification label according to PED-requirements shall be available for all valves.



## GENERAL SPECIFICATIONS

### **4. Flow regulation unit**

- 4.1. Flow regulation unit shall consist of PPS (glass-reinforced) / PE / PC / POM with EPDM sealings and a HNBR diaphragm.
- 4.2. Flow regulation unit shall be accessible for change-out or maintenance.
- 4.3. Flow regulation unit shall, via the actuator, be externally adjustable up to 100 different settings; minimum pressure range shall be capable of being activated by 30 kPaD (4.4 psid). Further, the flow regulation unit shall be capable of controlling the flow within  $\pm 5\%$  of controlled flow or  $\pm 2\%$  of maximum flow in a specified range of rated valve capacity.

### **5. Intelligent interface / electronic unit**

- 5.1. Intelligent interface shall consist of UL94 V0-rated plastic.
- 5.2. Intelligent interface shall be rated to IP54 including upside-down mounting.
- 5.3. Intelligent interface shall be driven by 24V AC/DC.
- 5.4. Intelligent interface shall be Bluetooth<sup>®</sup> enabled.
- 5.5. Intelligent interface shall be capable of communicating via BACnet with the control system and wireless feedback signal to handheld devices. Shall communicate with both Android and iPhone devices and display via App.

### **6. Temperature sensor**


- 6.1. Temperature sensors shall consist of AISI 304.
- 6.2. Temperature sensors shall be IP65.
- 6.3. Temperature sensors shall provide a resistive output signal corresponding to water temperature.

### **7. Pressure sensor**

- 7.1. Pressure sensors shall consist of AISI 304.
- 7.2. Pressure sensors shall IP65.
- 7.3. Pressure sensors shall be driven by 12V DC.
- 7.4. Pressure sensors shall provide a 4-20mA output signal corresponding to water pressure.



## APPLICATION AND SCHEMATIC EXAMPLE

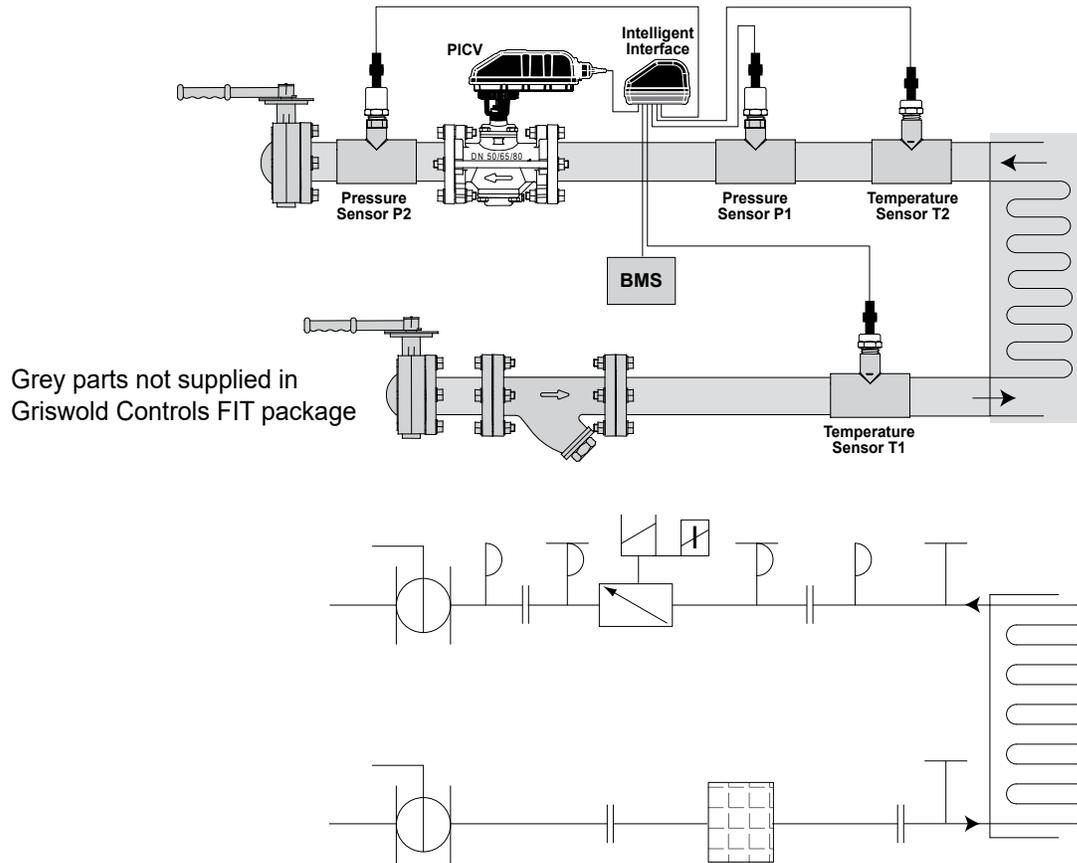

## UPDATES

For latest updates please see [www.griswoldcontrols.com](http://www.griswoldcontrols.com)

Griswold Controls can accept no responsibility for possible errors in any printed material. All rights reserved.