



# Griswold Controls Energy FIT-G System

*Energy-Saving Pressure Independent Temperature Control System  
DN15-50 / 1/2"-2"*



## FEATURES AND BENEFITS

The Griswold Energy FIT System is the world's first pressure independent temperature controlling regulation valve. With the FIT System you will get monitoring, measuring, connectivity and control in one package including PICV valve, sensor kit and the Intelligent Interface.

The FIT System measures energy usage while monitoring performance and adjusts the PICV valve to optimize coil performance. The PICV valve maintains the correct flow, despite pressure changes, and guarantees that flow and actuator position will only change when demand requirements change or  $\Delta T$  is outside specification. The FIT System is suitable for any sub-metering application.

With FIT's SMART control logic, room temperature (i.e. human comfort) will be prioritized as long as temperature is outside user specifications. Once within,  $\Delta T$  control will be prioritized and flow rates may be reduced, providing significant energy savings.

- **State-of-the-art** - Pressure independent temperature control.
- **All-in-one** including PICV, temperature and pressure sensors, flow meter and energy meter for sub-metering applications.
- **User friendly** with **easy** setting.
- **Cost savings** due to optimized energy consumption and improved efficiency.
- **Complete overview** of energy and flow.
- **Simple monitoring** via Bluetooth<sup>®</sup> or BACnet to BMS.
- **Clear information** regarding  $\Delta T$ ,  $\Delta P$ , flow rate and energy heat transfer.
- **Flexible solution** - also allowing upside-down installation.
- **No piping restriction** and most **compact** system on the market.

## TABLE OF CONTENTS

Features and benefits .....	1
Table of contents .....	2
Specifications .....	3
PICV valve .....	3
PICV actuators .....	4
Intelligent Interface .....	5
Temperature sensors (T1 and T2) .....	5
Pressure sensors (P1 and P2) .....	6
Dimensions and weight .....	7
Model number selection .....	8
Wiring instruction .....	9
Description .....	11
Flow rate setting .....	12
Control curve versus $\Delta T$ .....	13
General specifications .....	14
Pressure independent temperature control system .....	14
Valve actuator .....	14
Valve housing .....	14
Flow regulation unit .....	14
Intelligent interface / electronic unit .....	14
Temperature sensor .....	14
Pressure sensor .....	15
Application and schematic example .....	15
Updates .....	15



## SPECIFICATIONS

### **PICV valve**

Static pressure:	2500 kPa / 360 psi
Ambient temperature:	+1°C to +50°C / +34°F to +122°F
Media temperature <sup>1</sup> :	-20°C to +120°C / -4°F to +248°F
Material:	
• Housing and covers/headnut:	DN15-25small / 1/2"-1"small: DZR brass ASTM CuZn36Pb2As DN25large / 1"large: Brass ASTM CuZn40Pb2 DN32 / 1 1/4": DZR brass ASTM CuZn36Pb2As DN40-50 / 1 1/2"-2": Brass ASTM CuZn40Pb2 or Ductile iron GJS-450-10, EN 1563
• P/t plugs:	AB/ABV: DZR brass ASTM CuZn36Pb2As with PTFE seal
• Composite components:	DN15-32: PPS (glass-reinforced) / PC / POM / ABS DN40-50: PPS (glass-reinforced) / POM (glass-reinforced) / PSU (glass-reinforced) / ABS
• Metal components (internal):	Stainless steel
• O-rings and seats:	EPDM
• Diaphragm:	DN15-25 (1/2"-1") with 20 mm (3/4") insert: EPDM DN25-32 (1"-1 1/4") with 40 mm (1 1/2") insert: HNBR DN40-50 (1 1/2"-2") (one-unit): HNBR
Stroke:	DN15-25 (1/2"-1") with 20 mm (3/4") insert: 3.4 mm / 0.13 in DN25-32 (1"-1 1/4") with 40 mm (1 1/2") insert: 5.2 mm / 0.2 in DN40-50 (1 1/2"-2") (one-unit): 6.2 mm / 0.24 in
Maximum close off pressure:	800 kPa / 116 psi
Maximum operational ΔP:	800 kPaD / 116 psid
Control characteristic:	Linear flow
Control range:	1:800 / IEC 60534
Rangeability:	100:1
Turn down ratio:	100:1
Shut-off leakage:	ANSI / FCI 70-2 2006, Class IV / IEC 60534-4, Class IV
Flow rate range:	0.0103-3.79 l/sec / 0.163-60.0 GPM
End connection <sup>2</sup> :	Fixed female ISO or NPT
Housing taps:	1/4" ISO

Note 1: Stated temperature rating is defined due to no external condensation.

Note 2: NPT only available ex. US-factory.




## SPECIFICATIONS


### PICV actuators

FlowCon Actuator <sup>3</sup>	FN.0.2	FH	FH.1
Valve size	DN15-32 / 1/2"-1 1/4"	DN40-50 / 1 1/2"-2"	DN40-50 / 1 1/2"-2"
Supply voltage	24V AC/DC ±10%, 50/60Hz		
Type	Electrical, bi-directional synchronous motor		
Power consumption	<b>24V AC:</b> 0.9VA standby / 2.5VA operating / 4.7VA max. <b>24V DC:</b> 0.75W standby / 1.2W operating / 2.2W max.	<b>24V AC:</b> 1.5VA standby / 6VA operating / 8.5VA max. <b>24V DC:</b> 0.6W standby / 2.6W operating / 4.1W max.	<b>24V AC:</b> 2.6VA standby / 7.9VA operating / 9VA max. <b>24V DC:</b> 1.2W standby / 3.7W operating / 4.5W max.
Control signal	Analog 2-10V DC, <0.5mA		
Feedback	Yes, control signal		
Failsafe function	Fail in place	Fail in place	Optional open or close (set on actuator)
Auto stroke	Yes		
Operation time	Max 22 sec/mm	Max 22 sec/mm	Max 22 sec/mm (failsafe: 5 sec/mm)
Ambient temperature	0°C to +50°C / +32°F to +122°F		
Media temperature	0°C to +120°C / +32°F to +248°F		
Humidity rating	0..85% rH, no condensation		
Protection	IP54 including upside-down, class III, indoor use only		
Cable	Fixed, 5 wires x 0.50 mm <sup>2</sup> , 1.5 m / 5 wires x AWG20, 4.9 ft		
Closing point detection	During operation the actuator will self-adjust according to the closing point and stroke length of the valve.		
Weight	0.25 kg / 0.55 lb	0.30 kg / 0.67 lb	0.34 kg / 0.75 lb

Note 3: Warranty is voided using other actuators than supplied by Griswold Controls.



FlowCon FN.0.2



FlowCon FH/FH.1



## SPECIFICATIONS

### Intelligent Interface

Supply voltage:	24V AC -0%/+20%, 50-60Hz or 24V DC -0%/+20%
Power consumption:	4W
Cable, 3 groups:	
• Group 1:	fixed, 1 wire with quick-connector, 3 meter / 9 ft (T1) fixed, 1 wire with quick-connector, 1 meter / 3 ft (T2) fixed, 3 wires, 0.6 meter / 2 ft (analogue actuator communication)
• Group 2:	fixed, 2 wires 0.6 meter / 2 ft (power and ground) fixed, 3 wires 0.6 meter / 2 ft (BACnet BMS communication)
• Group 3:	fixed, 1 wire with quick-connector, 1 meter / 3 ft (P1) fixed, 1 wire with quick-connector, 1 meter / 3 ft (P2) fixed, 3 wires, 0.6 meter / 2 ft (BACnet actuator communication - not in use on Griswold Controls FIT-G)
Communication standard:	RS485
Control signal:	2-10V DC
Output signal:	2-10V DC
Humidity rating:	5..95% rH, no condensation
Protection:	IP54 including upside-down mounting
Housing material:	UL94 V0-rated plastic
CE conformity:	Yes
Protocol:	BACnet MS/TP
Interface:	EIA-485 / RS-485
Device profile:	BACnet Application Specific Controller (B-ASC) type server
Baud rates supported:	9600, 19200, 38400, 57600, 76800 and 115200
Services (BIBBS) supported	DS-RP-B, DS-WP-B, DM-DDB-B, DM-DOB-B, DM-DCC-B, DS-RPM-B and DM-RD-B
Participants:	Up to 32 recommended, max. 127 participants
Load:	1/8 unit load

### Temperature sensors (T1 and T2)

Supply voltage:	NA
Cable:	No cable, but with quick-connector
Signal output:	Resistive
Media temperature:	-20°C to +120°C / -4° to +248°F
Working pressure:	40 bar / 580 psi
Housing material:	304 stainless steel
Protection:	IP65
Probe length:	12.7 mm / 0.5 in (use of sensor pocket is recommended)
Probe diameter:	6 mm / 0.236 in
CE conformity:	Yes
Connection:	1/4" ISO

#### Performance data:

- Sensor type: PT1000
- Accuracy: 0.5% FS (Full Scale)
- Linearity: ±0.5% FS (Full Scale)
- Long time stability: 0.1% FS (Full Scale)
- Response time: at 50°C (122°F): 2.3 sec / at 90°C (194°F): 5.4 sec.



## SPECIFICATIONS

### Pressure sensors (P1 and P2)

Supply voltage:	12V DC
Cable:	No cable, but with quick-connector
Output:	4-20mA
Media temperature:	-10°C to +85°C / 14°F to +185°F
Pressure range <sup>4</sup> :	0-25 bar / 0-360 psi
Housing material:	304 stainless steel
Protection:	IP65
CE conformity:	Yes
Connection:	1/4" ISO

#### Performance data:

- Accuracy: ±1.5% FS (Full Scale)  
(tolerances can be software compensated in the Griswold Controls Intelligent Interface)
- Stability: 0.5% FS (Full Scale) ±0.05%
- Thermal effect on zero: ±0.1% FS (Full Scale)
- Thermal effect on span: ±0.05% FS (Full Scale)
- Electronic proof: Short circuit protection
- Response time: <20 msec (20 sec mean value calculated in the Griswold Controls Intelligent Interface)


Note 4: Calibrated at factory at 24V DC




## DIMENSIONS AND WEIGHT

Model no.	Valve size mm (in)	PICV Valve				Weight <sup>5</sup> kg (lb)
		L mm (in)	H1 mm (in)	FN.0.2 Actuator	FH Actuator	
				H2 mm (in)	H2 mm (in)	
FITG.x.15.x.x.2	15 (1/2)	81 (3.19)	31 (1.22)	124 (4.88)	-	1.51 (3.33)
FITG.x.20.x.x.2	20 (3/4)	85 (3.35)				1.53 (3.37)
FITG.x.25K.x.x.2	25 (1)	102 (4.02)				1.73 (3.81)
FITG.2.25.x.x.2	25 (1)	128 (5.04)	47 (1.85)	144 (5.67)	-	1.70 (3.75)
FITG.2.32.x.x.2	32 (1 1/4)					2.50 (5.51)
FITG.3.40.x.x.2	40 (1 1/2)	191 (7.50)	100 (3.94)	-	195 (7.67)	5.30 (11.7)
FITG.3.50.x.x.2	50 (2)					4.80 (10.6)

Note 5: Weight includes PICV valve (brass), PICV actuator non-failsafe, Intelligent Interface and sensor kit.

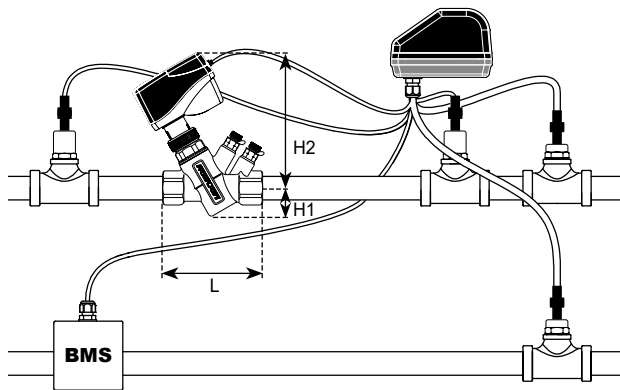

*Griswold Controls FIT-G.1  
with FN actuator,  
Intelligent Interface and sensor kit*

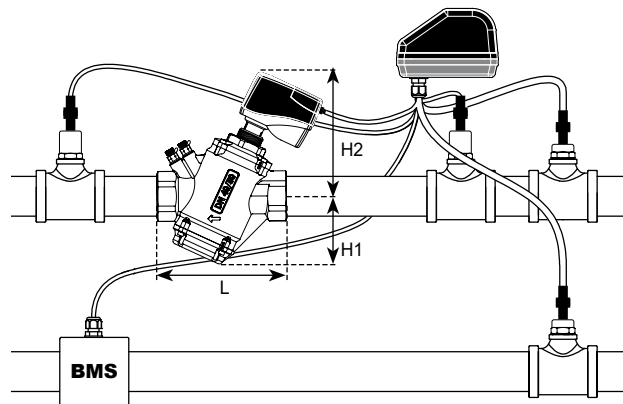

*Griswold Controls FIT-G.3  
with FH actuator,  
Intelligent Interface and sensor kit*



## MODEL NUMBER SELECTION

### FITG

Control range:

- 0** = 16-600 kPaD / 2.3-87 psid (for size DN15/20/25, 1/2"-1")
- 1** = 30-800 kPaD / 4.4-116 psid (for size DN15/20/25, 1/2"-1")
- 2** = 16-800 kPaD / 2.3-116 psid (for size DN25/32, 1"-1 1/4" )
- 3** = 16-600 kPaD / 2.3-87 psid (for size DN40/50, 1 1/2"-2")

Housing size and material:

- 15** = DN15 / 1/2" (DZR brass)
- 20** = DN20 / 3/4" (DZR brass)
- 25K** = DN25 / 1" for 20 mm insert (DZR brass)
- 25** = DN25 / 1" for 40 mm insert (brass)
- 32** = DN32 / 1 1/4" (DZR brass)
- 40** = DN40 / 1 1/2" (brass)
- 41** = DN40 / 1 1/2" (ductile iron)
- 50** = DN50 / 2" (brass)
- 51** = DN50 / 2" (ductile iron)

P/t plug requirements:

- B** = Pressure/temperature plugs (standard)
- P** = Plugs

Type of actuator:

- 1** = 2-10V modulating (FN.0.2 for DN15-32 / 1/2"-1 1/4" and FH for DN40-50 / 1 1/2"-2")
- 2** = 2-10V modulating and failsafe (FH.1 for DN40-50 / 1 1/2"-2")

Sensor kit:

- 2** = PICV valve, pressure/temperature sensor kit, Bluetooth® and ΔT control
- 3** = PICV valve, temperature sensor kit, Bluetooth® and ΔT control

### 1 wall bracket included (standard)


Example:

**FITG.1.15.B.1.2** = Griswold Controls Energy FIT-G System DN15 (1/2"), 30-800 kPaD (4.4-116 psid) with p/t plugs and 2-10V modulating actuator, pressure/temperature sensor kit, Bluetooth® and ΔT control incl. a wall bracket.


For **NPT threaded solution**, please add "**N**" at the end of the model number.




# WIRING INSTRUCTION

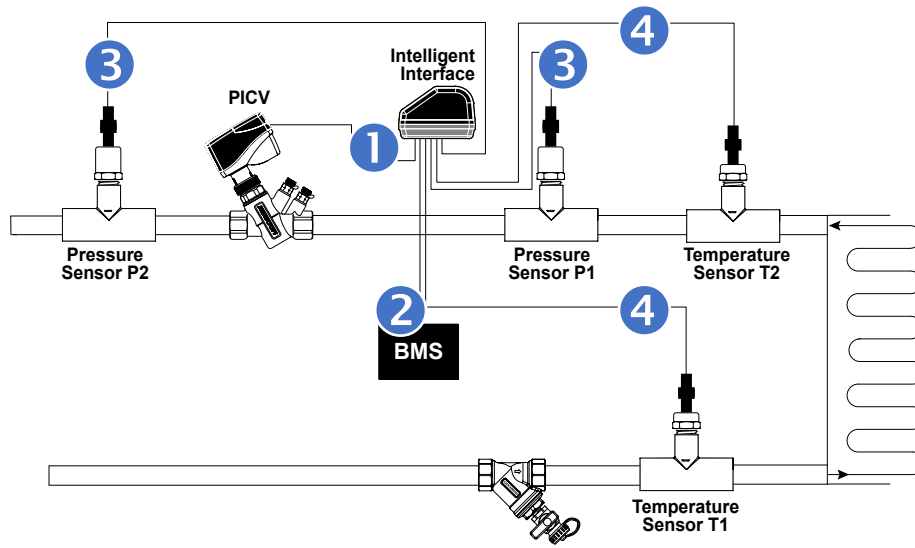

## 1

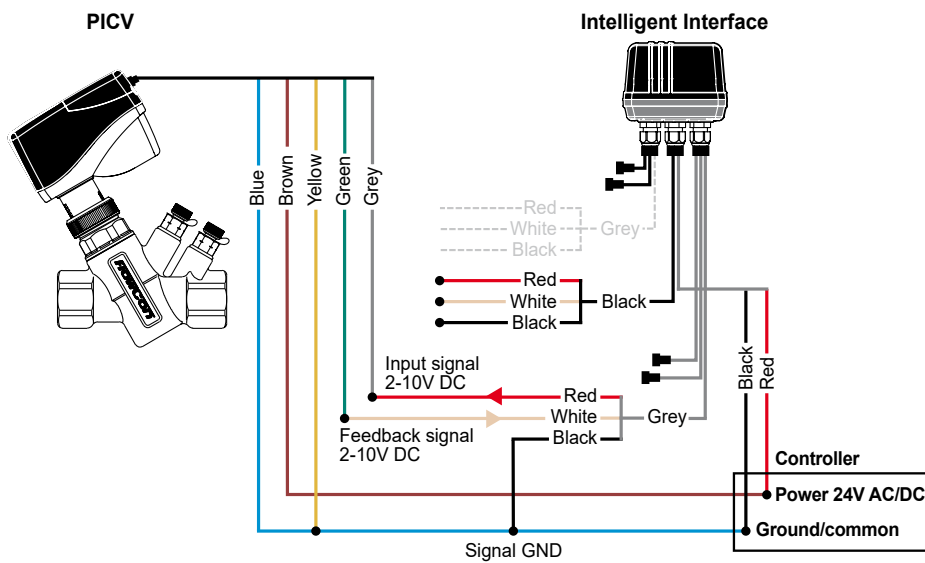


## 2

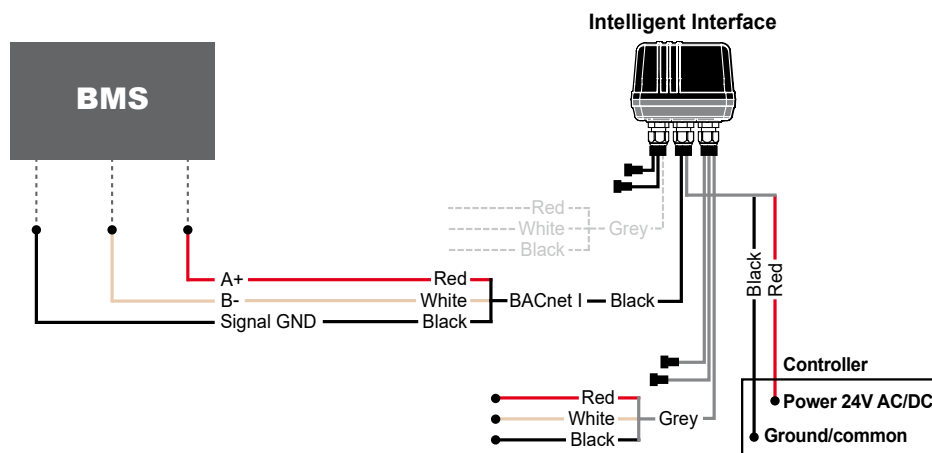




## WIRING INSTRUCTION

3

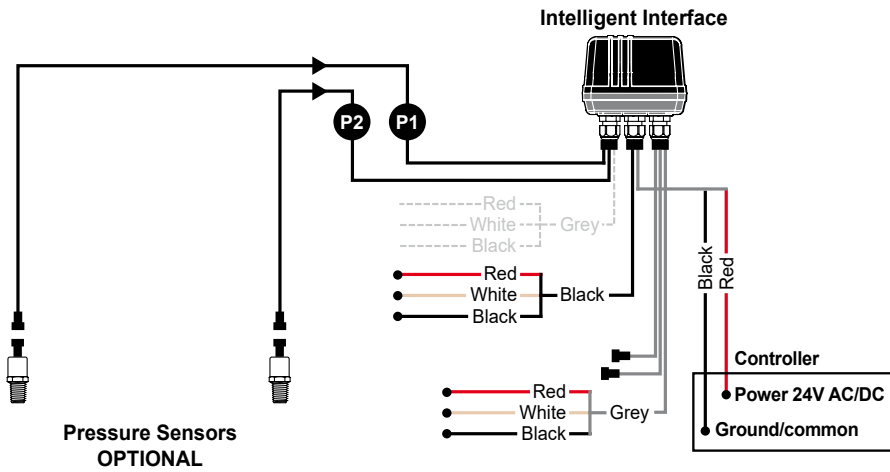

4

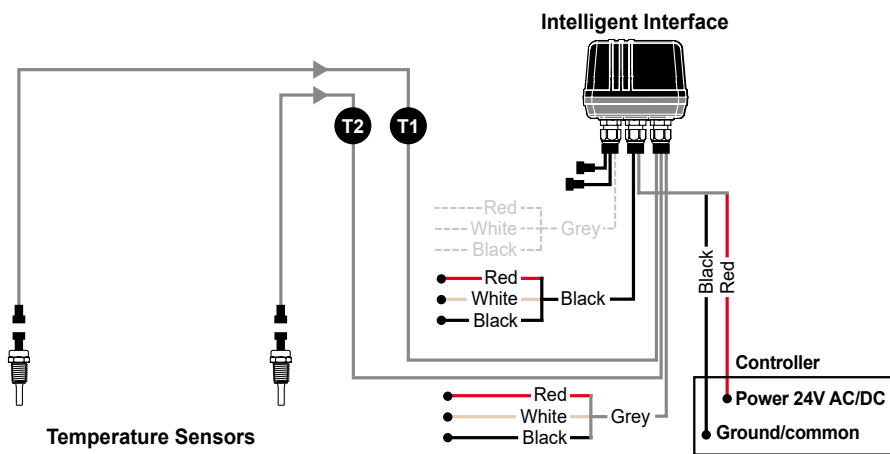



## DESCRIPTION

The Griswold Controls Energy FIT System measures energy usage while monitoring performance to adjust the PICV to optimize chiller performance. The PICV maintains the correct flow despite pressure changes and guarantees that flow and actuator position only change when demand requirements change or water  $\Delta T$  is outside of specification.

The Griswold Controls FIT is fully customizable and allows selection of components that work best to optimize the application's unique energy goals. It consists of a FIT Intelligent Interface and a FN/FH actuator. The FIT Interface has control logics based on sensor inputs. The sensors used for the FIT System are two PT1000 temperature sensors and optionally two 25 bar pressure sensors measuring relative to atmospheric pressure. The temperature sensors provide the Griswold Controls FIT with measurements of up- and downstream temperature, and the pressure sensors measure the  $\Delta P$  across the PICV allowing the BMS to reduce system pressure to save pump energy when pressure drop is higher than the PICV's requirements.

When the FIT System is set up with pressure and temperature sensors, inlet- and outlet temperatures, static and differential pressures, flow rate and BTU will be readable in the Building Management System through the BACnet objects. Also, the control objects can be controlled through the BACnet interface. For full detailed information, please see Griswold Controls FIT BACnet PICS.

There are 3 main control modes for the FIT module: direct  $\Delta T$  Control, direct Comfort Control, and Smart Control.  $\Delta T$  Control adjusts the flow through the valve with the aim of maintaining a set design  $\Delta T$  in the hydraulic system. Comfort Control allows you to adjust the control signal of the actuator directly and thereby control water flow rate like a standard control valve. And Smart Control uses a dual layer control characteristic. The main control is changing the flow to optimize the room temperature relative to the room temperature target. When the room temperature is within the accepted range, the  $\Delta T$  control is activated to optimize the water  $\Delta T$ .

Finally, the Griswold Controls Energy FIT System has local Bluetooth® access in immediate vicinity of the FIT Interface that can be used through the Griswold Controls App. The Griswold Controls Intelligent Interface calculates the BTU and displays the data via Bluetooth® on an Android or iPhone mobile device. In the Griswold Controls App you may connect to the FIT System by tapping "Connection" and "Search" for Griswold Controls systems around. Follow the steps in the App menu and press "Add". This way, you can monitor T1, T2,  $\Delta T$ , P1, P2,  $\Delta P$ , Flow, BTU and  $\Delta T$  target.





## FLOW RATE SETTING

	Griswold Controls FIT-G.0 (grey o-ring)			Griswold Controls FIT-G.1 (black o-ring)			Griswold Controls FIT-G.2 (black O-ring)			Griswold Controls FIT-G.3 <sup>8</sup>			Setting
	Insert size: 20 mm · 3/4"			Insert size: 20 mm · 3/4"			Insert size: 40 mm · 1 1/2"			DN40-50 · 1 1/2"-2"			
	16-600 kPaD <sup>6</sup> · 2.3-87 psid <sup>6</sup>			30-800 kPaD <sup>7</sup> · 4.4-116 psid <sup>7</sup>			16-800 kPaD · 2.3-116 psid (at setting: 2.6)			16-800 kPaD <sup>7</sup> · 2.3-116 psid <sup>7</sup>			
	l/sec	l/hr	GPM	l/sec	l/hr	GPM	l/sec	l/hr	GPM	l/sec	l/hr	GPM	
	-	-	-	0.0178	64	0.282	0.240	865	3.81	0.528	1900	8.36	1.0
	0.0103	37	0.163	0.0393	142	0.624	0.282	1010	4.46	0.633	2278	10.0	1.1
	0.0233	84	0.370	0.0580	209	0.920	0.322	1160	5.10	0.738	2655	11.7	1.2
	0.0322	116	0.510	0.0743	268	1.180	0.361	1300	5.72	0.843	3033	13.3	1.3
	0.0419	151	0.664	0.0887	319	1.41	0.399	1430	6.32	0.947	3410	15.0	1.4
	0.0500	180	0.792	0.102	366	1.61	0.435	1570	6.90	1.05	3787	16.7	1.5
	0.0569	205	0.902	0.113	408	1.80	0.471	1700	7.47	1.16	4163	18.3	1.6
	0.0650	234	1.03	0.124	446	1.96	0.506	1820	8.02	1.26	4537	20.0	1.7
	0.0719	259	1.14	0.134	482	2.12	0.540	1940	8.56	1.36	4909	21.6	1.8
	0.0781	281	1.24	0.143	516	2.27	0.573	2060	9.08	1.47	5279	23.2	1.9
	0.0839	302	1.33	0.152	549	2.42	0.605	2180	9.59	1.57	5646	24.8	2.0
	0.0889	320	1.41	0.161	580	2.56	0.636	2290	10.1	1.67	6011	26.4	2.1
	0.0942	339	1.49	0.170	611	2.69	0.667	2400	10.6	1.77	6372	28.0	2.2
	0.0981	353	1.55	0.178	641	2.82	0.696	2510	11.0	1.87	6730	29.6	2.3
	0.103	371	1.63	0.186	671	2.95	0.725	2610	11.5	1.97	7083	31.2	2.4
	0.106	381	1.68	0.194	700	3.08	0.753	2710	11.9	2.06	7432	32.7	2.5
	0.109	394	1.73	0.202	728	3.21	0.780	2810	12.4	2.16	7776	34.2	2.6
	0.113	406	1.79	0.210	756	3.33	0.807	2900	12.8	2.25	8115	35.7	2.7
	0.115	414	1.82	0.218	783	3.45	0.832	3000	13.2	2.35	8449	37.2	2.8
	0.119	428	1.88	0.225	810	3.56	0.858	3090	13.6	2.44	8777	38.6	2.9
	0.122	439	1.93	0.232	835	3.68	0.882	3180	14.0	2.53	9098	40.0	3.0
	0.125	449	1.98	0.239	860	3.79	0.906	3260	14.4	2.61	9413	41.4	3.1
	0.127	458	2.02	0.245	883	3.89	0.930	3350	14.7	2.70	9721	42.8	3.2
	0.130	468	2.06	0.252	906	3.99	0.953	3430	15.1	2.78	10021	44.1	3.3
	0.133	477	2.10	0.257	927	4.08	0.975	3510	15.5	2.86	10314	45.4	3.4
	0.135	486	2.14	0.263	946	4.17	0.997	3590	15.8	2.94	10599	46.6	3.5
	0.137	494	2.17	0.268	965	4.25	1.02	3670	16.1	3.02	10875	47.8	3.6
	0.140	503	2.21	0.273	982	4.32	1.04	3740	16.5	3.10	11142	49.0	3.7
	0.142	511	2.25	0.277	998	4.39	1.06	3820	16.8	3.17	11400	50.2	3.8
	0.144	518	2.28	0.281	1010	4.46	1.08	3890	17.1	3.24	11649	51.3	3.9
	0.146	526	2.31	0.285	1020	4.51	1.10	3960	17.4	3.30	11888	52.3	4.0
	0.148	532	2.34	0.288	1040	4.57	1.12	4030	17.7	3.37	12116	53.3	4.1
	0.149	538	2.37	0.291	1050	4.61	1.14	4100	18.1	3.43	12334	54.3	4.2
	0.151	544	2.39	0.294	1060	4.66	1.16	4170	18.4	3.48	12540	55.2	4.3
	0.153	549	2.42	0.296	1070	4.70	1.18	4240	18.7	3.54	12735	56.0	4.4
	0.154	553	2.43	0.299	1080	4.73	1.20	4300	19.0	3.59	12919	56.8	4.5
	0.155	559	2.46	0.301	1080	4.77	1.21	4370	19.2	3.64	13090	57.6	4.6
	0.156	563	2.48	0.303	1090	4.80	1.23	4440	19.5	3.68	13249	58.3	4.7
	0.158	567	2.50	0.305	1100	4.83	1.25	4500	19.8	3.72	13395	58.9	4.8
	0.159	571	2.51	0.307	1100	4.86	1.27	4570	20.1	3.76	13527	59.5	4.9
	0.160	575	2.53	0.308	1110	4.89	1.29	4630	20.4	3.79	13647	60.0	5.0

Accuracy: Greatest of either ±10% of controlled flow rate or ±5% of maximum flow rate.

Note 6: If used in pressure range 200-600 kPaD (29-87 psid), accuracy of -20% / +0% applies.


Note 7: If used in pressure range 400-800 kPaD (58-116 psid), accuracy of -20% / +0% applies.

Note 8: FIT-G.3 range recommended from setting 2.0 and up.

Griswold Controls recommends that the Griswold Controls Energy FIT System is selected to ensure that the set maximum flow rate is minimum 50% of the rated valve maximum capacity.



## CONTROL CURVE VERSUS $\Delta T$

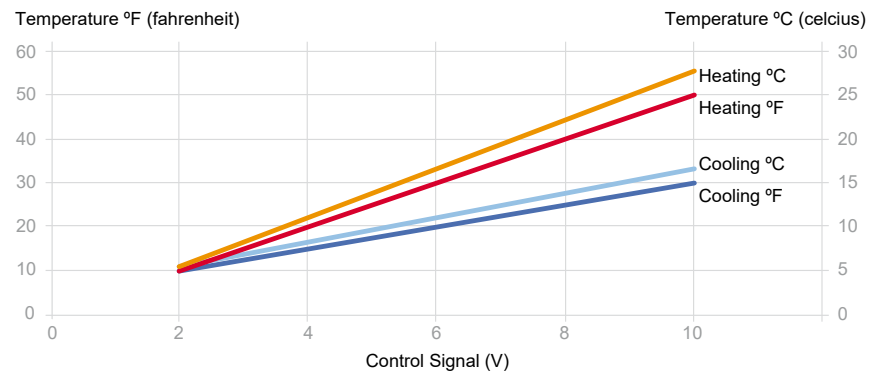



## GENERAL SPECIFICATIONS

### **1. Pressure independent temperature control system**

- 1.1. Contractor shall install where indicated in drawings.
- 1.2. System shall include a Pressure Independent Dynamic Control Valve, a sensor kit and an electronic unit.
  - 1.2.1. The PICV valve shall accurately control flow independent of system pressure fluctuations.
  - 1.2.2. The sensor kit shall include 2 temperature sensors and 2 optional pressure sensors. Temperature sensors shall measure the  $\Delta T$  across the coil and pressure sensors shall measure  $\Delta P$  across the PICV.
  - 1.2.3. The intelligent interface shall accurately change PICV flow to maintain target  $\Delta T$ . In addition, the electronic unit shall calculate BTU heat transfer and supply continuous information on  $\Delta T$  and flow.

### **2. Valve actuator**

- 2.1. Actuator housing shall be rated to IP54. 360° mounting shall be acceptable.
- 2.2. Actuator shall be driven by 24V AC/DC and accept 2-10V DC control signal.
- 2.3. Actuator shall use full stroke and provide full authority.
- 2.4. Actuator shall have visible indication of stroke position.
- 2.5. Feedback signal shall be equal to control signal, 2-10V DC.
- 2.6. Optional failsafe versions shall be available for DN40/50 (1 1/2"-2").
- 2.7. Auto stroke function shall be available.
- 2.8. Override shall be possible.

### **3. Valve housing**

- 3.1. Housing DN15-32 (1/2"-1 1/4") shall consist of brass ASTM CuZn40Pb2 or DZR brass STMCuZn36Pb2As and DN40-50 (1 1/2"-2") shall consist of brass ASTM CuZn40Pb2 or ductile iron GJS 450-10, EN 1563.
- 3.2. Housing shall be rated at no less than 2500 kPa (360 psi) static pressure and +120°C (+248°F).
- 3.3. Housing shall be permanently marked to show direction of flow.
- 3.4. Pressure/temperature test plugs for verifying accuracy of flow performance shall be standard on all valve sizes.

### **4. Flow regulation unit**

- 4.1. Flow regulation unit shall consist of PPS (glass-reinforced) / PC / POM / ABS and EPDM sealings with an EPDM diaphragm (20 mm / 3/4" insert) or a HNBR diaphragm (40 mm / 1 1/2" insert and DN40/50 / 1 1/2"-2" valve).
- 4.2. Flow regulation unit in DN15-32 (1/2"-1 1/4") shall be readily accessible, for change-out or maintenance. Any flow regulation unit shall be adjustable with the valve in-line and the system in operation.
- 4.3. Flow regulation unit shall be externally adjustable to 1 og 41 different flow rates without limiting the stroke length; minimum range shall be capable of being activated by minimum 16 kPaD (2.3 psid) and shall be capable of controlling the flow within  $\pm 10\%$  of controlled flow or  $\pm 5\%$  of maximum flow.

### **5. Intelligent interface / electronic unit**

- 5.1. Intelligent interface shall consist of UL94 V0-rated plastic.
- 5.2. Intelligent interface shall be rated to IP54 including upside-down mounting.
- 5.3. Intelligent interface shall be driven by 24V AC/DC.
- 5.4. Intelligent interface shall be Bluetooth® enabled.
- 5.5. Intelligent interface shall be capable of communicating via BACnet with the control system and wire-less feedback signal to handheld devices. Shall communicate with both Android and iPhone devices and display via App.

### **6. Temperature sensor**

- 6.1. Temperature sensors shall consist of 304 stainless steel.
- 6.2. Temperature sensors shall be IP65.
- 6.3. Temperature sensors shall provide a resistive output signal corresponding to water temperature.





## GENERAL SPECIFICATIONS

### 7. Pressure sensor

- 7.1. Pressure sensors shall consist of 304 stainless steel.
- 7.2. Pressure sensors shall IP65.
- 7.3. Pressure sensors shall be driven by 12V DC.
- 7.4. Pressure sensors shall provide a 4-20mA output signal corresponding to water pressure.

## APPLICATION AND SCHEMATIC EXAMPLE

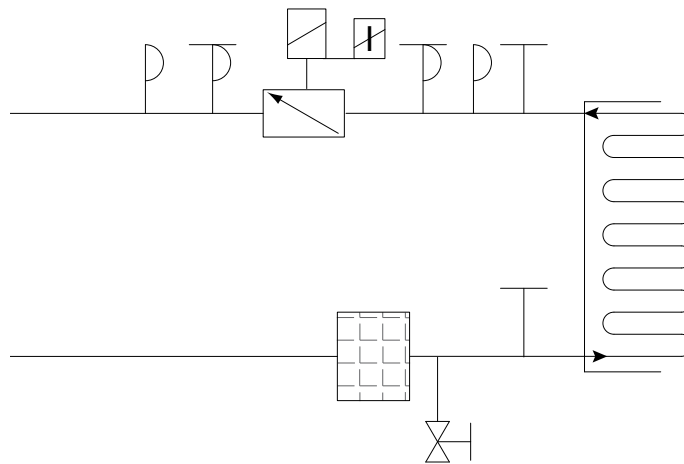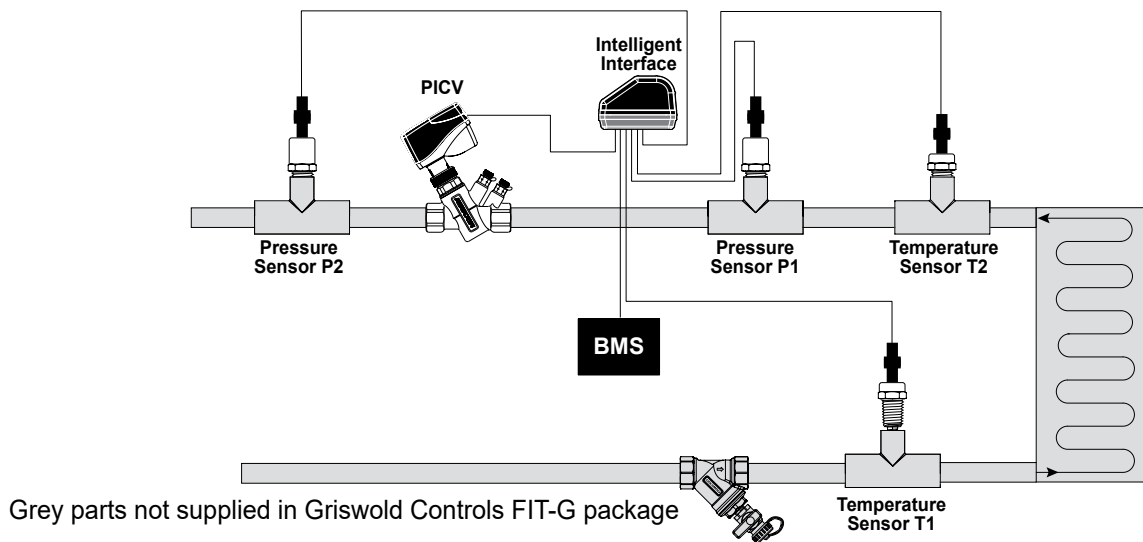

## UPDATES

For latest updates please see [www.griswoldcontrols.com](http://www.griswoldcontrols.com)

Griswold Controls can accept no responsibility for possible errors in any printed material. All rights reserved.